




Wireless actor with 4 outputs to control stack lights RF UBR SW915B-NET DC 4S Article no.: on request

Product features

- sWave.NET® wireless technology
- 4 x 24 VDC live NO contacts (relays)
- Simple operation and integration in existing ERP systems via Sensor Bridge
- LED for indication of operating state
- Wall mounting

Dimensions

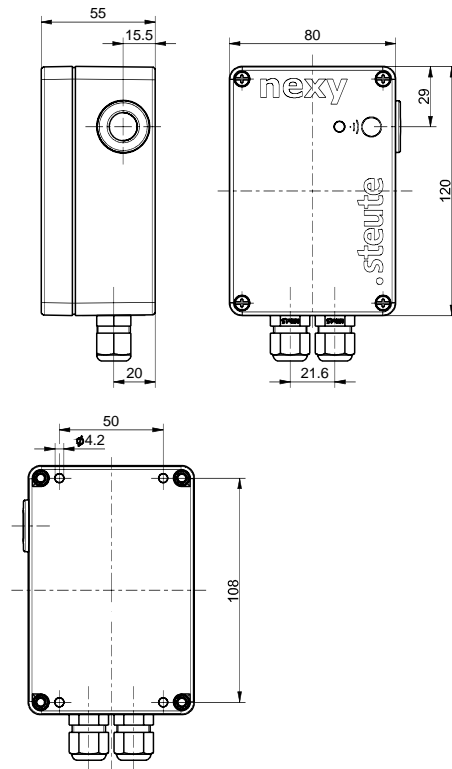

General technical data

Applied standards

EN 60947-5-1, EN 55011, EN 55032, EN 61000-6-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-11, EN 60068-2-6, EN 60068-2-27, EN 301 489-3, EN 300 220-2

Enclosure

ABS

Tightening torque

screw connection terminals: 0.5 Nm
cover screws: 1.2 Nm

Degree of protection

IP65 (IEC/EN 60529)

Mounting

wall mounting

Connection

screw connection terminals

Stripping length

8 mm

Cable cross-section

0.2 ... 2.5 mm²

Inputs

1 additional push button (LRN)

Rated operating current I_e

max. 0.1 A / 24 VDC + out

Rated operating voltage U_e

24 VDC -15 % ... +10 %

Derating

no

Number of channels

4

Outputs

4 x 24 VDC live NO contacts (relays)

Rated operating current/voltage I_e/U_e

output contacts: 24 VDC, 4 x 3 A, max. GND 3 A

Errors and omissions excepted.



Wireless actor with 4 outputs to control stack lights RF UBR SW915B-NET DC 4S Article no.: on request

General technical data (contd.)

| | |
|--|--|
| Utilisation category DC-1 | Mechanical life > 1 million operations |
| Telegram rate max. 12000 telegrams with repetitions/h | Degree of pollution 2 |
| Switching frequency max. 5 Hz | Ambient temperature 0 °C ... +62 °C |
| Display green LED: ready for operation, orange LED: signalling of switching state | Storage and shipping temperature -25 °C ... +85 °C |

Wireless technology

| | |
|---|--|
| General | Transmission power < 25 mW |
| Frequency 914.2 MHz (USA, Canada) | Wireless approvals USA: FCC - VPYLBA0QB1SJ Canada: IC - 772C-LBAA0QB1SJ |
| Data rate 62.5 kbps | Function |
| Channel bandwidth 500 kHz | Wireless range max. 450 m outdoors, max. 40 m indoors |
| Modulation type CSS | |
| Protocol sWave.NET® | |

Errors and omissions excepted.