



Andon push button RF MAKD 3F SW917-NET Article no.: 1267645


Product features

- sWave.NET® wireless technology
- Thermoplastic enclosure
- With 3 buttons and display

Notes

- The front foil is resistant to alcohol, ester, dilute acids, dilute alkalis, solvents, ketones and household cleaning agents.
- The battery must be ordered separately.

Dimensions

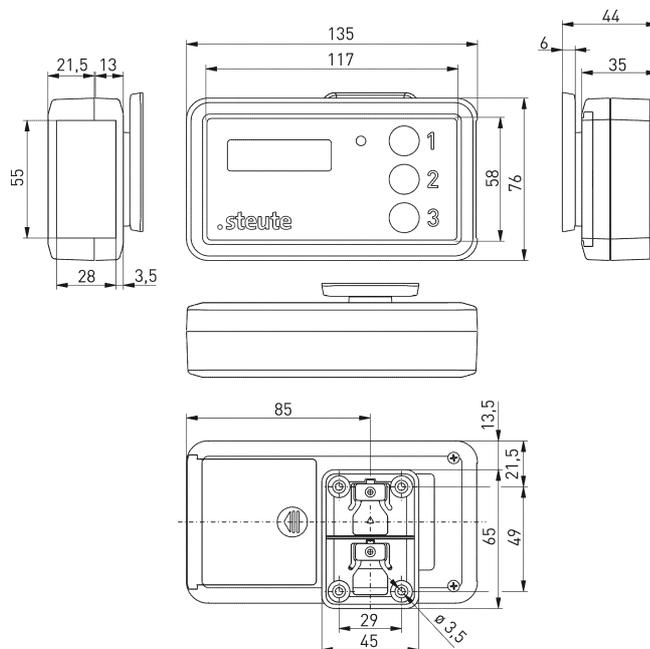

General technical data

Applied standards

EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 301 489-3, EN 300 220-2

Enclosure

ABS, self-extinguishing UL 94 V-0

Degree of protection

IP40 (IEC/EN 60529)

Voltage source

3 x batteries Mignon/AA/LR6 (replaceable)

Battery life

up to 7 years, depending on switching frequency and activity time of the display

Display

monochrome, high-contrast, 2x16 characters for individual text

Ambient temperature

-10 °C ... +60 °C

Wireless approvals

Brazil: ANATEL 04172-18-06718

Weight

174 g

Wireless technology

Frequency

917 MHz (Brazil)

Data rate

66 kbps

Channel bandwidth

550 kHz

Modulation type

2-FSK

Protocol

sWave.NET®

Transmission power

< 25 mW

Wireless range

max. 450 m outdoors, max. 40 m indoors

Errors and omissions excepted.