




Laser sensor RF 96 SDS SW922-NET Article no.: 1398270

Product features

- sWave.NET® wireless technology
- Laser sensor: Logging with IR laser
- Impervious to optical interference from industrial surroundings
- Configurable online via wireless interface
- Simple operation and integration in existing ERP systems via Sensor Bridge
- Simple assembly in commercially available standard shelves
- Power supply by Lithium battery (replaceable)

Dimensions

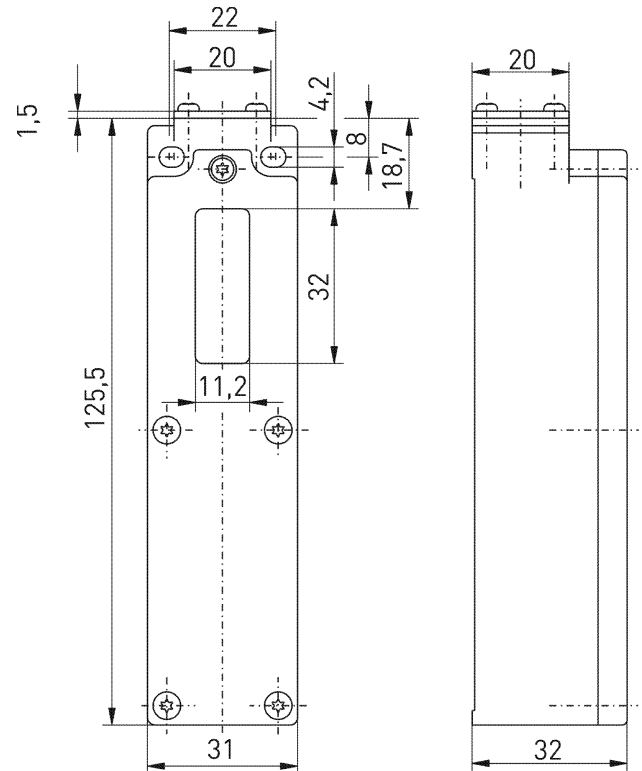

General technical data

Applied standards

EN 60947-5-2, EN 61000-6-2, EN 61000-6-3, EN 301 489-3, EN 300 220-2

Enclosure

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0

Tightening torque

M4 enclosure mounting screws: max 1.2 Nm
M2.5 cover screws: approx. 0.45 Nm

Degree of protection

IP54 (IEC/EN 60529)

Sensor

logging with IR laser

Laser class

Class 1 to EN 60825-1; 950 nm

Ambient temperature

0 °C ... +65 °C

Telegram rate

max. 1440 telegrams with repetitions/h

Switching frequency

adjustable 1 Hz to 0.032 Hz, default 0.2 Hz

Cycle time

adjustable, default 5 s, min. 1 s, max. 31 s

Switching distances

0 - 5 cm ... 0 - 50 cm, adjustable in 1 cm steps

Accuracy

± 20 mm

Field of view

27°

Hysteresis

one side, default 4 cm, adjustable in 1 cm steps

Standby current

130 µA with default settings (5 s cycle time)

Actuating time

min. 20 ms

Note

transmission of battery voltage and switching condition

Errors and omissions excepted.



Laser sensor RF 96 SDS SW922-NET Article no.: 1398270

General technical data (contd.)

Wireless approvals

Japan:  ARIB STD-T108: 204-610002

Wireless technology

Frequency 916.5 MHz (Japan)	Protocol sWave.NET®
Data rate 66 kbps	Transmission power < 1 mW
Channel bandwidth 520 kHz	Wireless range max. 150 m outdoors, max. 20 m indoors
Modulation type 2-FSK	

Voltage supply

Voltage source lithium battery Tadiran SL-2770 (C), replaceable	Battery life Typical values with default settings.
System Li/SOCl ₂	Actuation interval
Nominal voltage 3.6 V	10 s: approx. 5.7 years
Nominal capacity 8.5 Ah	100 s: approx. 6.2 years
	1,000 s: approx. 6.2 years
	10,000 s: approx. 6.2 years
	N.B.: Changes in battery lifetime are almost linear to changes in cycle time.

Errors and omissions excepted.